

INTERIOR EAVE
CATWALK

ROOF




FILE 5.12
VERSION 1
COD
13/11/2019



TECHNICAL SPECIFICATIONS

Walkway on the eave.

To work on maintenance tasks.

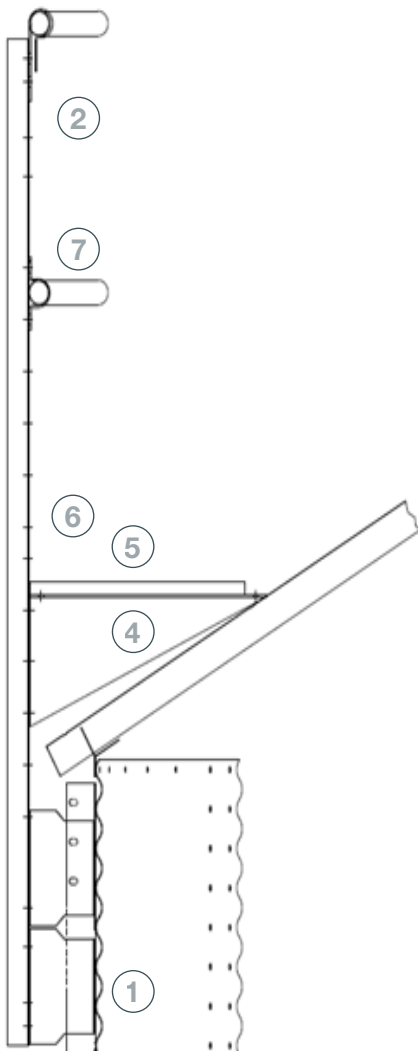

PARTS AND MATERIALS

- 1** CLIP FOR HANRAIL BRACKET
 - Connection between the handrail bracket and the stiffener to support the floor
 - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 2** HANRAIL BRACKET
 - "U" profile 60x50x1280 mm of cold rolled steel to support the tubular handrails
 - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 3** CLIPS
 - Folded sheet to join the handrail to the handrail brackets
 - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 4** HOLDING ANGLE
 - Folded sheet 550x250 mm to support the floor
 - MATERIAL: galvanised steel S280 GD Z600 MAC e= 3mm
- 5** FLOOR
 - Sheet with holes or TrameX fixed over the floor support angle
 - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 6** FOOT PROTECTION EAVE CATWALK
 - Folded sheet 120x2474x1.5 mm located on the edge of the floor
 - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 7** TUBULAR HANDRAIL
 - Pipe Ø48 mm fixed to the handrail brackets
 - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm