


ROOF
STEPS

ROOF
COMPONENT

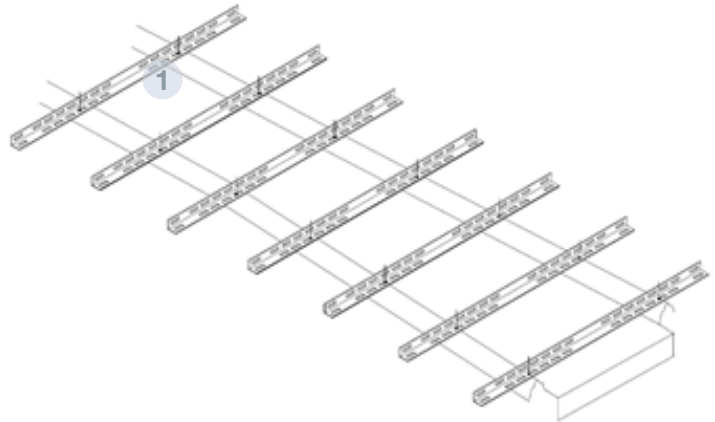

TECHNICAL SPECIFICATIONS

Ladder with steps “L”40x40 to communicate the EAVE – CHARGE SYSTEM and improve the way to the manhole and the catwalks.

Each step is screwed to 2 roof waves.

To improve the security it can be installed with handrails.

It's a standard design to all the silos with universal steps.

A ladder is supplied as standard accessory although it's possible install more to help the ways on the roof.

PARTS AND MATERIALS

- 1 ROD LADDER RUNG
- “L” profiles 40x40x1100mm with holes
 - MATERIAL: galvanised steel S280 GD Z600 MAC e= 3mm