

## MANTEINANCE PLATFORM

## ACCESSORIES SUPPLEMENTARY STRUCTURES




FILE 6.17  
VERSION 2  
COD. ASPLATMANT1-8 - ASPLATMANTE - ASPLATENTRE  
28/01/2021



## TECHNICAL SPECIFICATIONS

Platform supported on 3 beams attached to the walkway. It is an extension of the walkway corridor that allows creating more space to maintain the gates and motors.

It can be a floor or grid type, it has a railing and allows passage in the event of equipment in nearby areas.

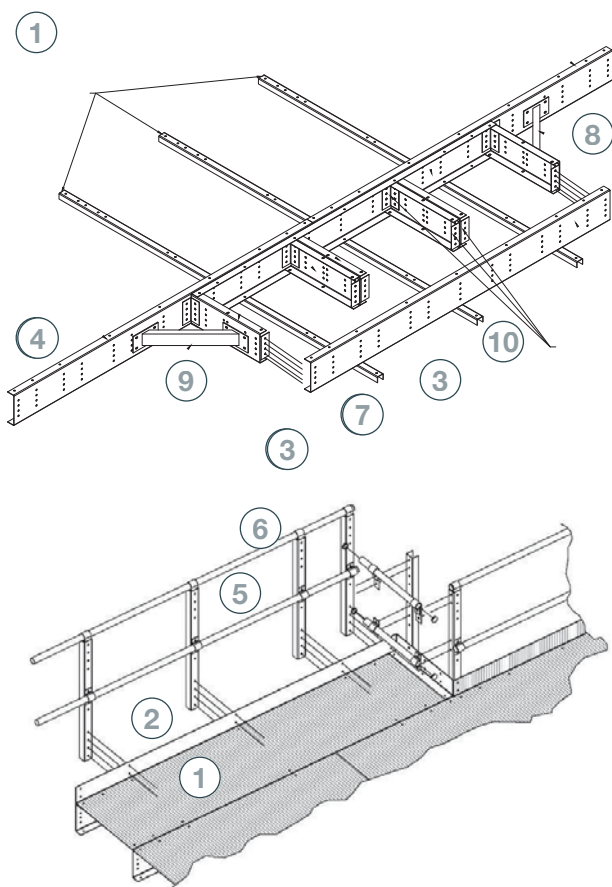

## PARTS AND MATERIALS

- 1 FLOOR**
  - Inlaid sheet metal floor or grid to install on the beams
  - FLOOR MATERIAL: Galvanized steel S280 GD Z600 MAC e = 3mm
  - GRID MATERIAL: Tramex 30x30-25x2 GALVANIZED
- 2 FOOT ANGLE**
  - Folded sheet metal for floor-"U" splice connection
  - MATERIAL: Galvanized steel S280 GD Z600 MAC e = 3mm
- 3 CLIPS SPLICE**
  - Folded sheet metal for the "U" splice-reinforcement joint
  - MATERIAL: Galvanized steel S280 GD Z600 MAC e = 3mm
- 4 "U" SPLICE**
  - "U" profile 263x3000 of folded sheet metal that forms the main structure of the platform
  - MATERIAL: Galvanized steel S280 GD Z600 MAC e = 3mm
- 5 HANDRAIL BRACKET**
  - Cold rolled steel "U" profile 60x60x1370
  - MATERIAL: Galvanized steel S280 GD Z600 MAC e = 3mm
- 6 HANDRAIL**
  - TUBE Ø48x3000x1,5mm
  - MATERIAL: Galvanized steel
- 7 "U" SPLICE SHORT**
  - "U" profile 263x687 of folded sheet metal forming the main structure of the platform
  - MATERIAL: Galvanized steel S280 GD Z600 MAC e = 3mm
- 8 MODELING BOARD**
  - Sheet for connecting the "U" profile - Clip splice
  - MATERIAL: Galvanized steel S280 GD Z600 MAC e = 3mm
- 9 PLATFORM DIAGONAL**
  - Available in two sizes: 700 ó 1400mm
- 10 "U" SPLICE LARGE**
  - Measure 254x687 mm
  - Clamped to the main structure by clips