

STANDARD CATWALK

SUPPORTS AND COLUMNS



FILE 6.7
VERSION 2
COD. ASPA5070500
28/01/2021



TECHNICAL SPECIFICATIONS

Beam-formed catwalk consisting of 4/5 cold formed "U" stringers S280 GD Z600


On the stringers, we place the floor and the handrail.

Modular system, screw-on, flexible while defining lengths and widths.

In the catwalk, there are a walkway (700 mm width) and the redler side (variable).

Can be open or closed.

The floor can be a grid floor or a simple drilled sheet.

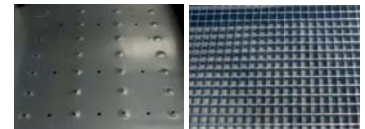

Standard

Tramex

TTYPES:

Depending on the redler width, catwalks can be:

- 700 : (only walkway)
- 1400 : 700 + 700
- 2100 : 700 + 700 + 700
- 1600 : 700 + 900
- 2300 : 700 + 900 + 700
- 1800 : 700 + 1100

