

DOUBLE  
BODYSHEET  
ACCESS DOOR

ACCESSORIES  
CYLINDER



FILE 4.6  
VERSION 2. 11/08/2021

COD. ASPUERV\*\*




## TECHNICAL SPECIFICATIONS

Rectangular door to access the silo (1).  
This door can be placed in silos from 4.60 to 16.80 with a maximum of 15 rings.

It is made up of 3 inner leaves and an outer one screwed onto a hinged frame. Both have a FOAM closing system (10x3mm) to guarantee their watertightness. The closing system has been improved with wing nuts that adjust the leaves to the frame.

The frame is welded to a corrugated sheet that is part of the silo cylinder.

It is easy to install and ships as an optional silo accessory.

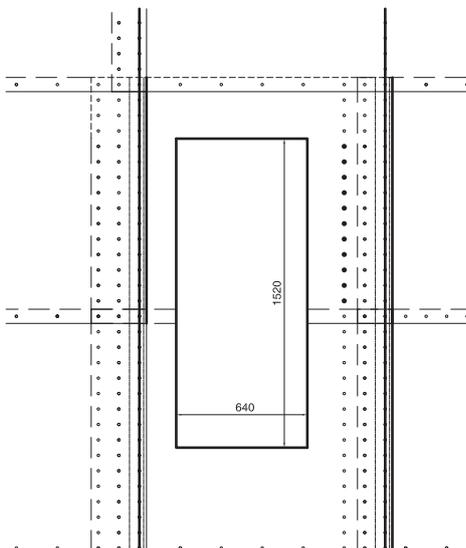

## PARTS AND MATERIALS

- 1 ACCESS DOOR**
  - Formed by two sheets, exterior and interior, bolted to a frame
  - Dimensions: 1520 X 640 mm.
  - MATERIALS: S275JR HDG galvanized steel
- 2 SHEET METAL FRAME**
  - Development: 2400 x 1140 mm
  - Material: S350GD Z600