

EXTERIOR EAVE
CATWALK

ROOF



FICHA 5.11
VERSIÓN 2. 14/06/2021


COD AS****PASALE2
AS****PASALE3



TECHNICAL SPECIFICATIONS

Walkway on the eave.

To work on maintenance tasks.

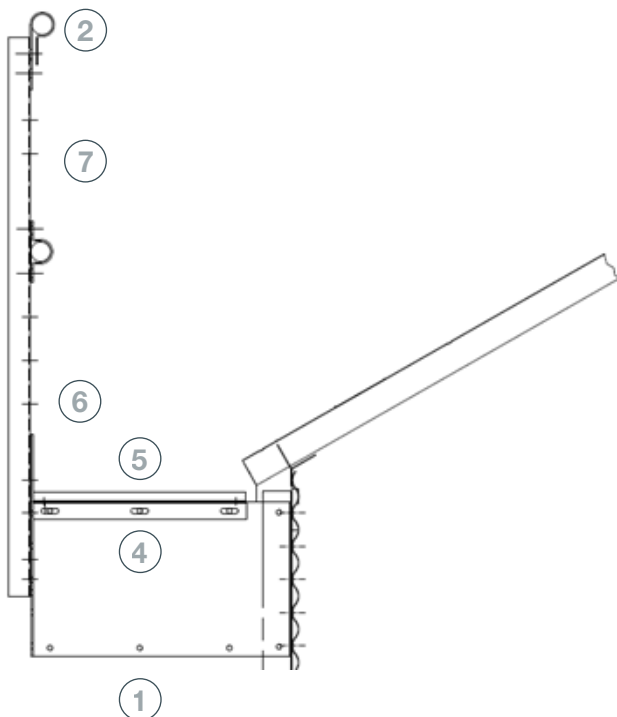

PARTS AND MATERIALS

- 1** CLIP FOR HANRAIL BRACKET
 - Connection between the handrail bracket and the stiffener to support the floor
 - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 2** HANRAIL BRACKET
 - "U" profile 60x50x1280 mm of cold rolled steel to support the tubular handrails
 - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 3** CLIPS
 - Folded sheet to join the handrail to the handrail brackets
 - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 4** FLOOR SUPPORT ANGLE
 - "L" profile 40x40x494 mm of cold rolled steel
 - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 5** FLOOR
 - Sheet with holes or TrameX fixed over the floor support angle
 - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 6** FOOT PROTECTION EAVE CATWALK
 - "L" profile 155x100x860 mm located on the platform's edge
 - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 7** TUBULAR HANDRAIL
 - Pipe Ø48 mm fixed to the handrail brackets
 - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm