

SPIRAL
LADDER

ACCESSORIES
STAIRS



FILE 5.18
VERSION 2. 14/06/2021

COD. AS**ESCESP



TECHNICAL SPECIFICATIONS


Stairs around the silo's wall composed by horizontal steps and platform to access to the roof without climbing.

It has intermediate platforms each 2 rings (2240mm).

The maximum distance between platforms according to the rule is 3m.

A simple ladder (vertical ladder H=1140mm) to enable the access from the last platform to the roof.

INCOMPATIBILITIES Incompatible with Silos SCE.

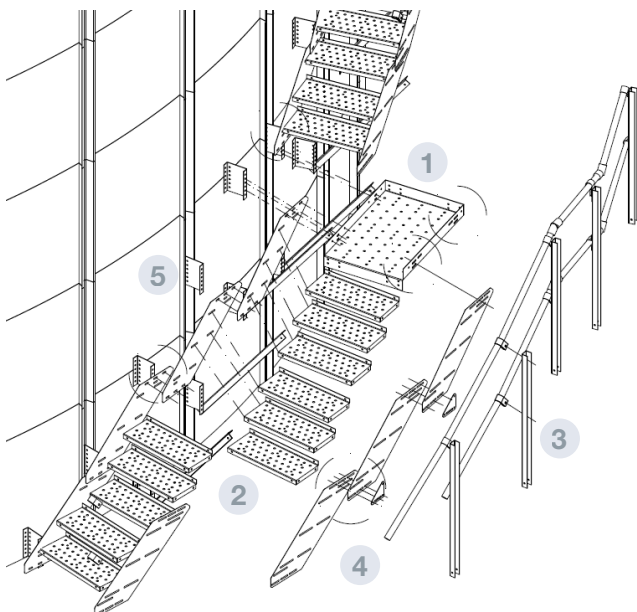

PARTS AND MATERIALS

- 1 INTERMEDIATE PLATFORM**
 - Sheet with holes
 - Dimensions: 1200x690 ó 1000x690 mm
 - Each 2280 mm according to the rule EN ISO 14222
 - Material: galvanised steel S280GD Z 600 e= 3 mm
- 2 RUNG**
 - Sheet with holes
 - Dimensions: 270x690 mm
 - Material: galvanised steel S280GD Z 600 e= 2 mm
- 3 CURVE HANDRAIL**
 - Curved pipe Ø48x1.5x3000 mm
 - Material: galvanised steel S280GD Z 275
- 4 OUTSIDE AND INSIDE STRINGER**
 - Material: galvanised steel S280GD Z 600 e= 2 mm
- 5 SUPPORT FOR INSIDE STRINGER**
 - Material: galvanised steel S280GD Z 600 e= 3 mm