

STANDARD CATWALK

SUPPORTS AND COLUMNS



FILE 6.7

VERSION 3. 21/06/2021

COD. ASPAS***S00, ASPAS***R00, ASPAS***SCR, ASPAS***RCR, ASPAS***SX0, ASPAS***RX0, ASPAS***S02, ASPAS***R02, ASPOR001, ASPOR002, ASPOR003, ASPISPASES, ASPISPASTRA



TECHNICAL SPECIFICATIONS

Beam-formed catwalk consisting of 4/5 cold formed "U" stringers S280 GD Z600


On the stringers, we place the floor and the handrail.

Modular system, screw-on, flexible while defining lengths and widths.

In the catwalk, there are a walkway (700 mm width) and the redler side (variable).

Can be open or closed.

The floor can be a grid floor or a simple drilled sheet.

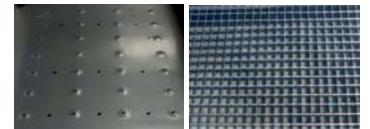


Standard

Tramex

TYPES:

Depending on the redler width, catwalks can be:

- 700 : (only walkway)
- 1400 : 700 + 700
- 2100 : 700 + 700 + 700
- 1600 : 700 + 900
- 2300 : 700 + 900 + 700
- 1800 : 700 + 1100

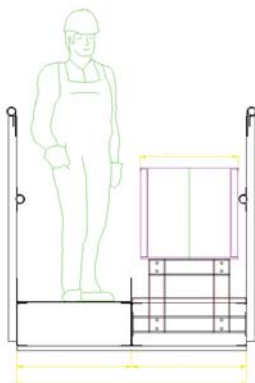

WIDTH	STANDARD FLOOR	GRID FLOOR	STANDARD FLOOR (REINFORCED)	GRID FLOOR (REINFORCED)
REDLER: - WALKWAY: 700 mm TOTAL: 700 mm				
REDLER: 700 mm WALKWAY: 700 mm TOTAL: 1400 mm				
REDLER: 900 mm WALKWAY: 700 mm TOTAL: 1600 mm				
REDLER: 1100 mm WALKWAY: 700 mm TOTAL: 1800 mm				

STANDARD CATWALK

SUPPORTS AND COLUMNS



FILE 6.7

VERSION 3. 21/06/2021

COD. ASPAS*S00, ASPAS***R00, ASPAS***SCR, ASPAS***RCR, ASPAS***SX0, ASPAS***RX0, ASPAS***S02, ASPAS***R02, ASPOR001, ASPOR002, ASPOR003, ASPISPASES, ASPISPASTRA**

With corridor:

WIDTH	STANDARD FLOOR	GRID FLOOR	STANDARD FLOOR (REINFORCED)	GRID FLOOR (REINFORCED)
REDLER: 700 (+ 700) mm WALKWAY: 700 (+ 700) mm TOTAL: 2100 mm				
REDLER: 900 mm WALKWAY: 700 + 700 mm TOTAL: 2300 mm				
REDLER: 1100 mm WALKWAY: 700 + 700 mm TOTAL: 2500 mm				
REDLER: 700 + 700 mm WALKWAY: 700 + 700 mm TOTAL: 2800 mm				
REDLER: 1100 + 1100 mm WALKWAY: 700 mm TOTAL: 2900 mm	??	??		

PARTS AND MATERIALS

- 1 SPACES AND JOINTS
 - Profiled sheet of different lengths: 3000, 2000 and 1000mm.
 - Material: Galvanized steel S280GD Z600 MAC e = 3mmMAC
- 2 RAILING TUBES
 - 3000mm tubular handrail.
 - Material: Tube D45 S280GD Z600 MAC e = 1.0mm
- 3 RAILING POSTS
 - Profiled sheet of different lengths (total): 1370, 1905 and 2441mm.
 - Material: Galvanized steel S280GD Z600 MAC e = 3mm
- 4 FLOOR
 - Standard option
 - Punched sheet with non-slip embossments of lengths: 3000, 2000 and 1000mm and widths 700, 900 and 1100mm.
 - Material: Galvanized steel S280GD Z600 MAC e = 3mm
 - Tramex option
 - 30x30 non-slip grating with 25x2 galvanized plates of 1000mm length and 700, 900 and 1100mm widths.