

SPIRAL LADDER

ACCESSORIES STAIRS



FILE 5.18
VERSION 3. 03/07/2023

COD. AS**ESCESP




TECHNICAL SPECIFICATIONS

Stairs around the silo's wall composed by horizontal steps and platform to access to the roof without climbing.

It has intermediate platforms each 2 rings (2240mm).
The maximum distance between platforms according to the rule is 3m.
Top platform is at the height of the eave.

It can assembly in both direction, clockwise and counter-clockwise.

INCOMPATIBILITIES Incompatible with
Silos SCE.

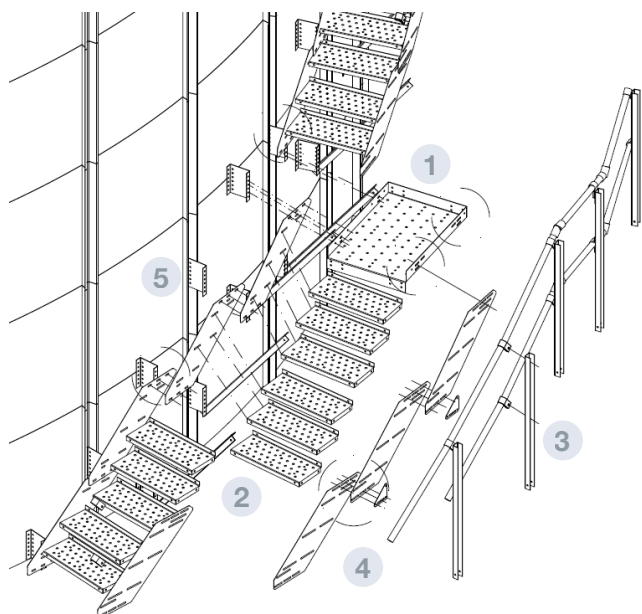

PARTS AND MATERIALS

- 1 INTERMEDIATE PLATFORM**
 - Sheet with holes
 - Dimensions: 1200x690 ó 1000x690 mm
 - Each 2280 mm according to the rule EN ISO 14222
 - Material: galvanised steel S280GD Z 600 e= 3 mm
- 2 RUNG**
 - Sheet with holes
 - Dimensions: 270x690 mm
 - Material: galvanised steel S280GD Z 600 e= 2 mm
- 3 CURVE HANDRAIL**
 - Curved pipe Ø48x1.5x3000 mm
 - Material: galvanised steel S280GD Z 275
- 4 OUTSIDE AND INSIDE STRINGER**
 - Material: galvanised steel S280GD Z 600 e= 2 mm
- 5 SUPPORT FOR INSIDE STRINGER**
 - Material: galvanised steel S280GD Z 600 e= 3 mm