


Eave catwalk. Interior & exterior Accessories. Roof.

EXTERIOR EAVE
CATWALK

ROOF

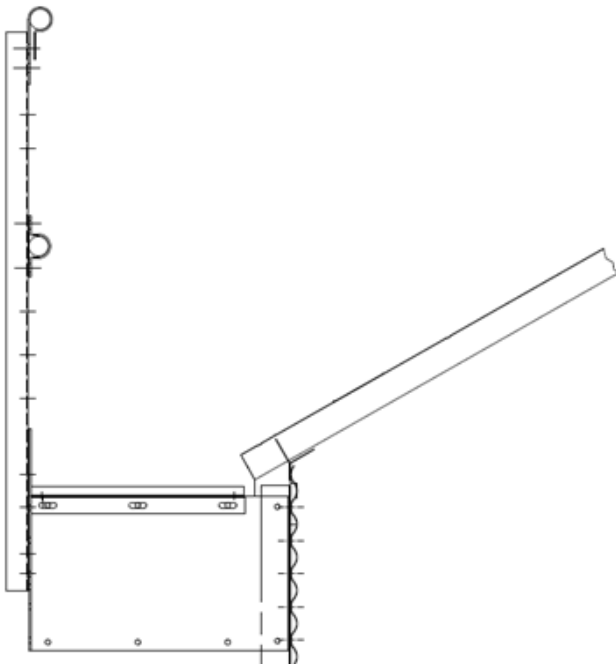

FICHA 5.11

VERSIÓN 2. 14/06/2021

COD AS****PASALE2


AS****PASALE3



TECHNICAL SPECIFICATIONS

Walkway on the eave.

To work on maintenance tasks.

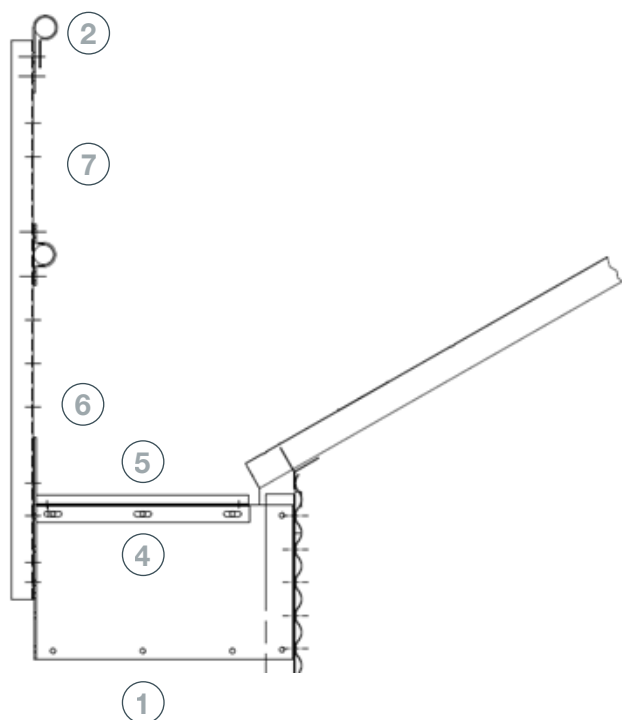

PARTS AND MATERIALS

- 1 CLIP FOR HANRAIL BRACKET**
 - Connection between the handrail bracket and the stiffener to support the floor
 - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 2 HANRAIL BRACKET**
 - "U" profile 60x50x1280 mm of cold rolled steel to support the tubular handrails
 - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 3 CLIPS**
 - Folded sheet to join the handrail to the handrail brackets
 - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 4 FLOOR SUPPORT ANGLE**
 - "L" profile 40x40x494 mm of cold rolled steel
 - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 5 FLOOR**
 - Sheet with holes or Tramex fixed over the floor support angle
 - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 6 FOOT PROTECTION EAVE CATWALK**
 - "L" profile 155x100x860 mm located on the platform's edge
 - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 7 TUBULAR HANDRAIL**
 - Pipe Ø48 mm fixed to the handrail brackets
 - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm

INTERIOR EAVE
CATWALK

ROOF




FILE 5.12

VERSION 2. 31/08/2021

COD AS****PASALEINT2


AS****PASALEINT3

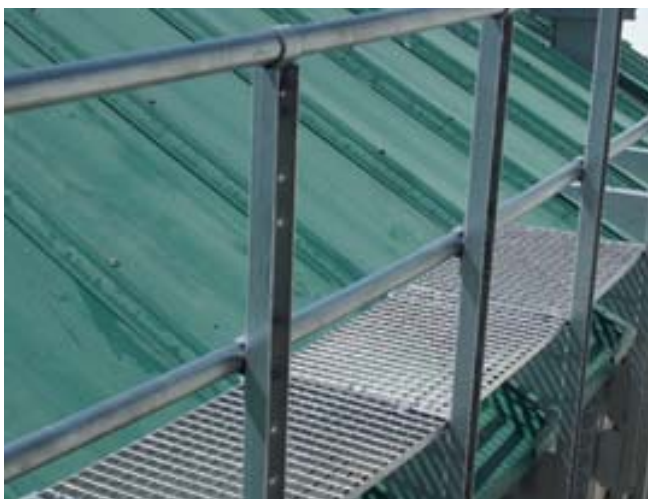

TECHNICAL SPECIFICATIONS

Walkway on the eave.

To work on maintenance tasks.

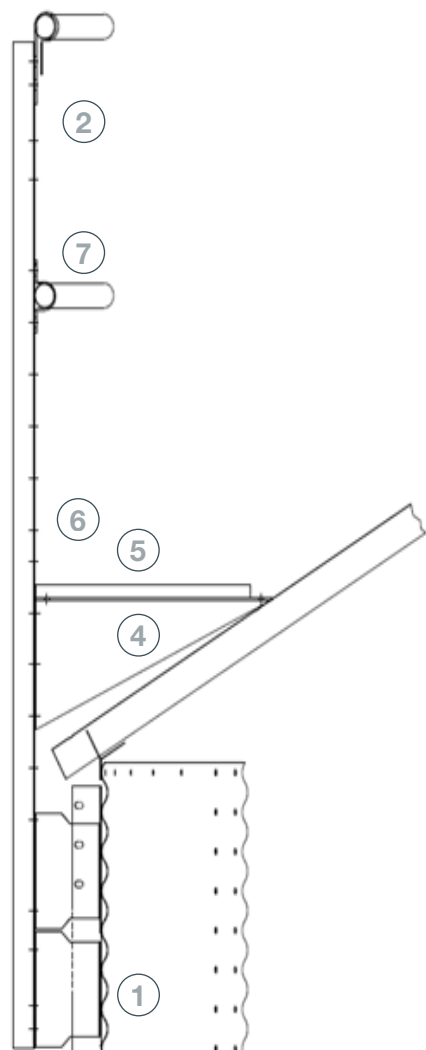

PARTS AND MATERIALS

- 1 CLIP FOR HANRAIL BRACKET**
 - Connection between the handrail bracket and the stiffener to support the floor
 - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 2 HANRAIL BRACKET**
 - "U" profile 60x50x1280 mm of cold rolled steel to support the tubular handrails
 - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 3 CLIPS**
 - Folded sheet to join the handrail to the handrail brackets
 - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 4 HOLDING ANGLE**
 - Folded sheet 550x250 mm to support the floor
 - MATERIAL: galvanised steel S280 GD Z600 MAC e= 3mm
- 5 FLOOR**
 - Sheet with holes or Tramex fixed over the floor support angle
 - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 6 FOOT PROTECTION EAVE CATWALK**
 - Folded sheet 120x2474x1.5 mm located on the edge of the floor
 - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 7 TUBULAR HANDRAIL**
 - Pipe Ø48 mm fixed to the handrail brackets
 - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm



Offices and Factory:

Ctra. de Arenas km. 2.300
13210 Villarta de San Juan • Ciudad Real - Spain
T: +34 926 6294

Madrid Office:

C/Azcona, 37 • 28028 Madrid - Spain T:
+34 91 726 43 04

symaga@symaga.com
www.symaga.com