


ROOF INSPECTION DOOR

ACCESSORIE



FILE 1.3
VERSION 1. 21/10/2024

COD. ASPUERTAT

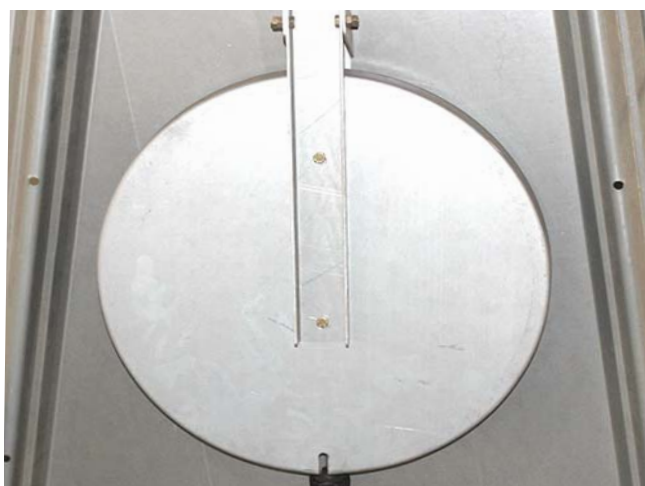

TECHNICAL SPECIFICATIONS

Circular door (Ø 400) to watch the grain onto the watertank.
It has a pressure closure to fix the door.

It's installed over special roof sectors. They have a hole (Ø420) and a fold on the edge to improve the sealing.

This roof sectors are the same that are used to the roof aeration.

PARTS AND MATERIALS

- 1 U PROFILE**
 - "U" profile 60x50x430 of cold rolled steel
 - MATERIAL: galvanised steel S 280 GD Z 600 MAC
- 2 COVER**
 - Circular plate (Ø515)
 - MATERIAL: galvanised steel S 280 GD Z 600 MAC e=60mm
- 3 "U" HINGE**
 - To join "U" profile and the roof sector
 - MATERIAL: galvanised steel S 280 GD Z 600 MAC
- 4 WEATHER STRIP**
 - To seal the closure
 - MATERIAL: rubber
- 5 RING**
 - Close frame of the door
 - MATERIAL: galvanised steel S 280 GD Z 600 MAC
- 6 CLOSURE PRESSURE HINGE**
 - Close system of the door with M8 x 35

