

## PEAK PLATFORM

## ACCESSORIES SUPPLEMENTARY STRUCTURES



FILE 6.19  
VERSION 1. 09/03/2026

COD. ASPLATCUP



## TECHNICAL SPECIFICATIONS

Maintenance platform installed around the central opening of the silo roof, designed to provide safe access for inspection, maintenance and loading operations.

It is made of galvanised steel and has a non-slip metal grating floor, which guarantees a safe surface and allows water and dust to drain away.


The assembly includes perimeter guardrails and connects directly to the silo's external ladder, facilitating safe access to equipment installed on the roof, such as the inspection hatch or filling systems.

**Recommended** combine with roof ladder and spiral staircase

**Incompatible** with catwalks

### Dimensions:

- Silos 460-1451: Width grid floor 680mm.
- Silos 1528-1680: Width grid floor 830mm.

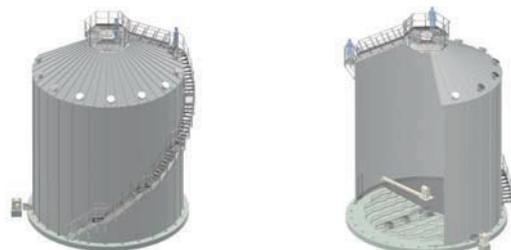

## PARTS & MATERIALS

- 1 HANDRAIL POST**
  - Galvanised sheet metal
  - MATERIAL: Galvanized steel S280 GD Z600
  - MAC e= 3mm
- 2 TUBULAR HANDRAIL**
  - Tube Ø48x1,0mm
  - MATERIAL: Galvanized steel S280 GD Z600
  - MAC e= 1mm
- 3 FLOOR**
  - Grid 30X30-25X2 galvanized
  - MATERIAL: Galvanized steel
- 4 SKIRT BOARD**
  - Galvanised sheet metal
  - MATERIAL: Galvanized steel S280 GD Z600
  - MAC e= 3mm

